

# DCE33 - 30 lb Gourmet Ice Machine

## Legacy Under-Counter Gourmet Ice Machine



### Features

- 15" cabinet width, produces up to 30 lbs. of gourmet ice in 24 hours. Stores up to 26 lbs.
- Uniquely-shaped, crystal-clear, slow-melting, taste-free, odorless ice - won't dilute the flavor of drinks.
- Maintains ideal bin capacity with automatic shut-off and restart.
- Accepts custom wood panels to match your decor.
- Available with built-in drain pump.
- Available in stainless steel finish only.
- Field reversible door.

### 24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
30 / 13.6	16 / 7.2	26 / 12



### Gourmet Ice




Gourmet Cube  
1" x 1 1/8" x 1 1/4"  
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for beverages.

### Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

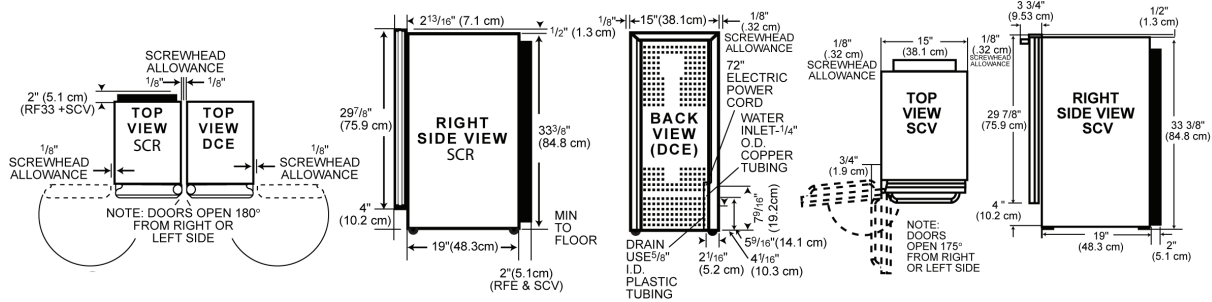

- Water supply line not included.
- Pump model: 3/8" drain line "included"
- Gravity model: 5/8" drain line "field supplied"

## All Models

24 Hour Ice Production:  
(70 deg. Air/50 deg. Water)  
30 lb / 13.6 kg  
(90 deg. Air / 70 Deg. Water)  
16 lb / 7.2 kg

Bin Storage Capacity:  
26 lb / 12 kg

Condenser Type:  
Air

Basic Electrical:  
(Volts/Hz/Phase)  
115/60/1

Amps:  
3.6

Maximum Fuse Size:  
15

Refrigerant:  
R-134A

Dimensions (W x D x H):  
Unit (without legs adjusted):  
15" x 22.8125" x 33.875"  
(38.1 x 57.94 x 86.04 cm)

Shipping Carton:  
18" x 28" x 38"  
(45.7 x 71.1 x 96.5 cm)

## Specifications

Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
DCE33A-1SSD	Stainless Steel / Aluminum	Gravity	83 / 38
DCE33PA-1SSD	Stainless Steel / Aluminum	Pump	83 / 38

From Ice Machine To Drain

Normal Drain Line, Pitched Down From Ice Machine Good Draining

With Trap, Causes Poor Draining Poor Draining

With Trap And Vent, Draining is Normal Good Draining

EXAMPLES OF GRAVITY DRAIN TUBE INSTALLATIONS

DCE33A: Gravity flow drain tube  
DCE33PA: Built-in pump to expel drain water which includes 10' drain tube

## Accessories

Model	Description	Shipping Weight lb / kg
KHAND	Custom Handle Trim Piece (Top)	1 / 0.45
KCE18-B	18" Filler Kit - Available in Black	5 / 2.3
KD Black	Handle with Black Label for DCE	1 / 0.45
KSS	Wrap Around Stainless Steel Door Sleeve Kit	12 / 5.5
SS-33	Stainless Steel Front Panel Kit	9/4
KSKPC	Aluminum Kick Plate Cover	1/0.45

## Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	14 PSIG (1 bar)	70 PSIG (5 bar)
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Scotsman products, except model SCCG50MA-1SS & SCCP5050MA-1SS, SCN60 are not designed for outdoor installations nor for installation where air temperatures fall below 50°F, or exceed 100°F, nor where water temperatures fall below 40°F, or exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Refer to owner's manual for all installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.